Document #0083 REV B Whisper 100/200 Specification Sheet

Technical Specifications











Rotor Diameter: 46 inches (1.15m)

> 13 lbs (5.85kg) Weight:

Shipping Dimensions: Shipping: 27"x15"x9" (686x38x228mm) / 17 lbs (7.7kg))

> 1.5" schedule 40 pipe (1.9" OD, 48 mm) Mount:

Start-up wind speed: 8 mph (3.58 m/s)

> Voltage: 12, 24, 34 and 48 VDC

Rated Power: 400 watts at 28mph (12.5m/s)

Turbine Controller: Microprocessor-based smart internal regulator with Peak Power Tracking

> Body: Cast aluminum (Air-X Marine is powder coated for corrosion protection)

Blades (three): Carbon Fiber Composite


Over-speed Protection: Electronic torque control

Kilowatt hours per month: 38 kWh/mo @12mph (5.4m/s)

> Warranty: 3 Year Limited Warranty


Survival Wind speed: 110 mph (49.2 m/s)



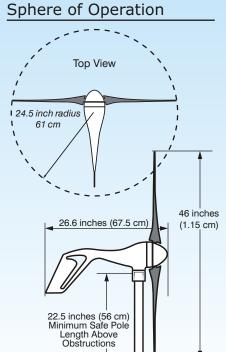

2.0 inches






Southwest Windpower

Renewable Energy Made Simple

Performance Curves



Rayleigh Distribution Curve k=2

Top Line - Non-Turbulent Site Bottom Line - Turbulent Site

© 2005 Southwest Windpower, Inc.